

1. Description


1.1. Project

Project Name	horno01
Board Name	horno01
Generated with:	STM32CubeMX 4.18.0
Date	06/26/2017

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48


2. Pinout Configuration

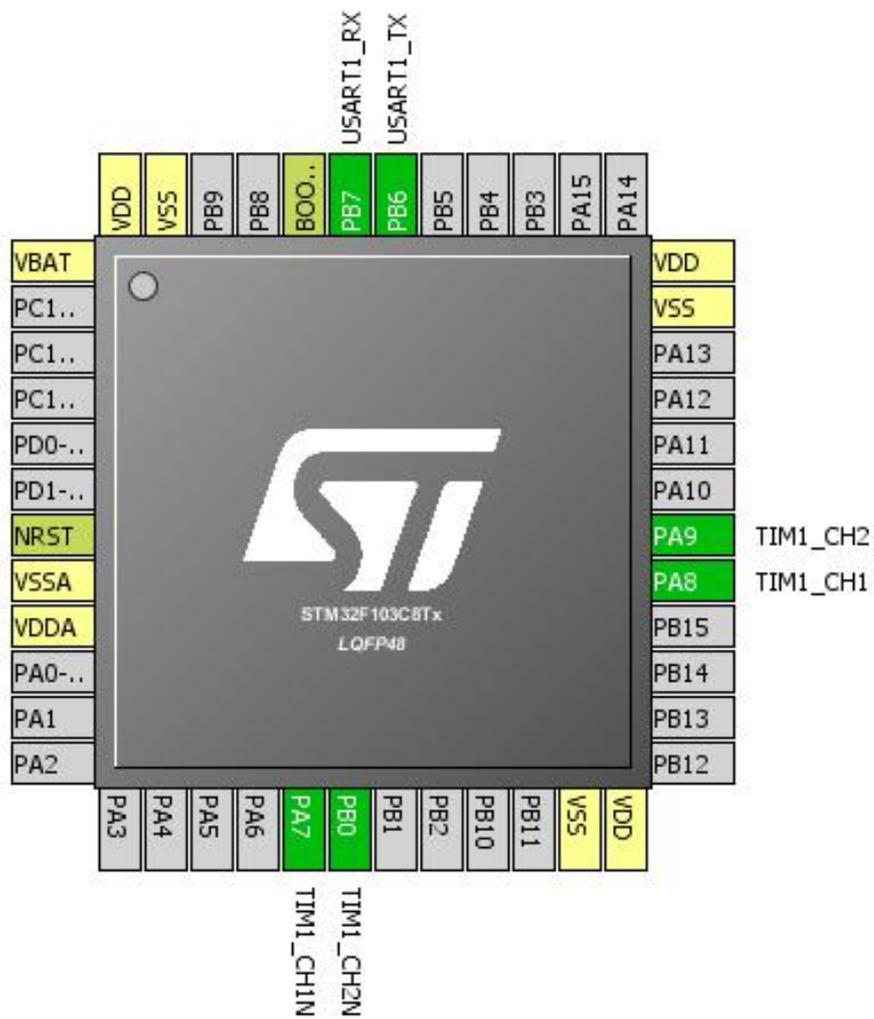

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
17	PA7	I/O	TIM1_CH1N	
18	PB0	I/O	TIM1_CH2N	
23	VSS	Power		
24	VDD	Power		
29	PA8	I/O	TIM1_CH1	
30	PA9	I/O	TIM1_CH2	
35	VSS	Power		
36	VDD	Power		
42	PB6	I/O	USART1_TX	
43	PB7	I/O	USART1_RX	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

4. Clock Tree Configuration

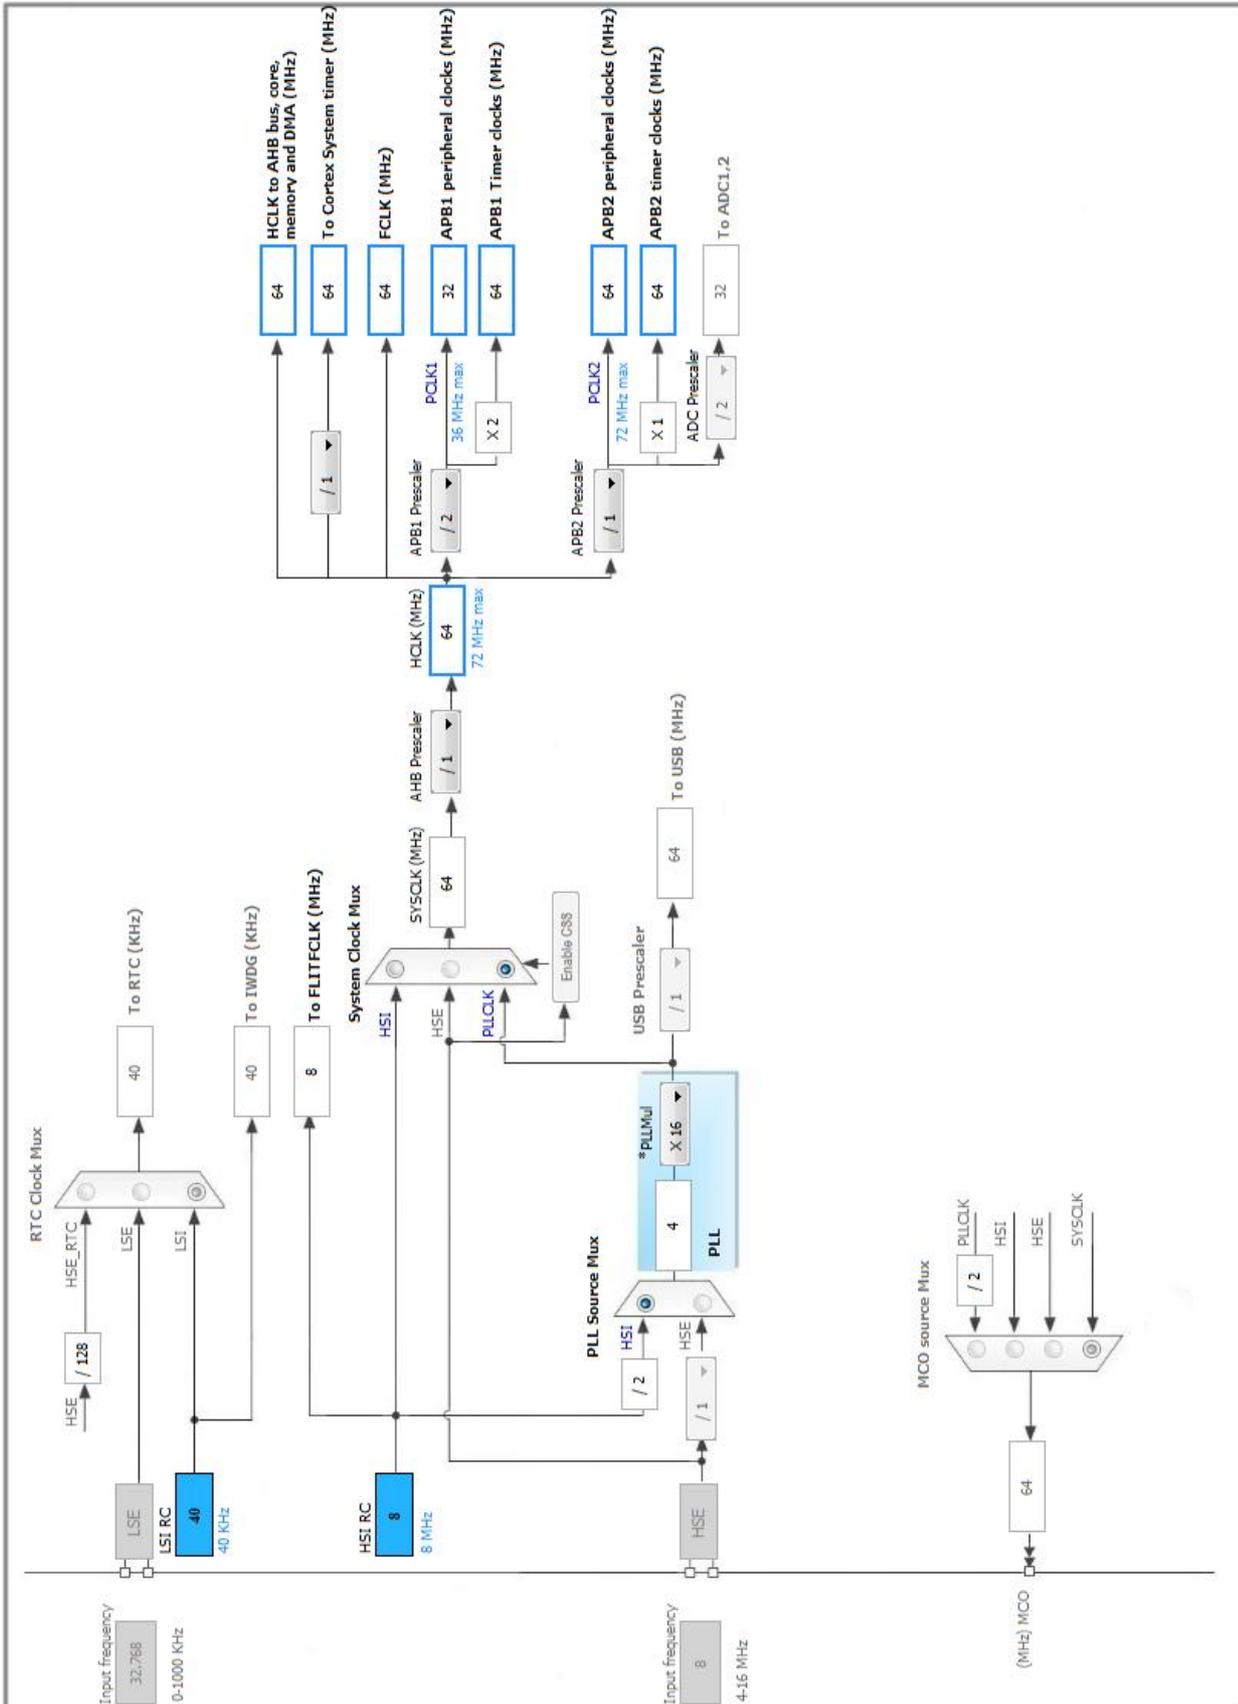

5. IPs and Middleware Configuration

5.1. SYS

Debug: No Debug

Timebase Source: SysTick

5.2. TIM1

Clock Source : Internal Clock

Channel1: Output Compare CH1 CH1N

Channel2: Output Compare CH2 CH2N

5.2.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	99 *
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSl)	Disable
Lock Configuration	Off
Dead Time	20 *

Output Compare Channel 1 and 1N:

Mode	Frozen (used for Timing base)
Pulse (16 bits value)	0
CH Polarity	High
CHN Polarity	High
CH Idle State	Reset

CHN Idle State	Reset
Output Compare Channel 2 and 2N:	
Mode	Frozen (used for Timing base)
Pulse (16 bits value)	0
CH Polarity	High
CHN Polarity	High
CH Idle State	Reset
CHN Idle State	Reset

5.3. USART1

Mode: Asynchronous

5.3.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.4. FREERTOS

mode: Enabled

5.4.1. Config parameters:

Versions:

CMSIS-RTOS version	1.02
FreeRTOS version	8.2.3

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128

MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
TOTAL_HEAP_SIZE	3072
Memory Management scheme	heap_4
USE_ALTERNATIVE_API	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

USE_TRACE_FACILITY	Enabled
GENERATE_RUN_TIME_STATS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

5.4.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled

vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled

* **User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
TIM1	PA7	TIM1_CH1N	Alternate Function Push Pull	n/a	Low	
	PB0	TIM1_CH2N	Alternate Function Push Pull	n/a	Low	
	PA8	TIM1_CH1	Alternate Function Push Pull	n/a	Low	
	PA9	TIM1_CH2	Alternate Function Push Pull	n/a	Low	
USART1	PB6	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PB7	USART1_RX	Input mode	No pull-up and no pull-down	n/a	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
PVD interrupt through EXTI line 16		unused	
Flash global interrupt		unused	
RCC global interrupt		unused	
TIM1 break interrupt		unused	
TIM1 update interrupt		unused	
TIM1 trigger and commutation interrupts		unused	
TIM1 capture compare interrupt		unused	
USART1 global interrupt		unused	

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	horno01
Project Folder	H:\new st project\FreeRtos Horno Rampabus\horno01
Toolchain / IDE	EWARM
Firmware Package Name and Version	STM32Cube FW_F1 V1.4.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No